



## Applications

- Back sonar of automobiles
- Parking meters
- Water level meters

**RoHS  
Compliant**


## Features

- Water proof and dual use
- Compact and light weight
- High sensitivity and sound pressure
- Less power consumption
- High reliability

## Technical Terms


Item	Specification	Unit
Construction	Water Proof	-
Using Method	Dual Use	-
Centre Frequency	40 ±1kHz	kHz
Sound Pressure Level	≥90(30cm/10Vrms )	dB
Sensitivity	≧-75dB/V/μbar	dB
Echo Pulse Width	≥360μs (at 1.2m)	μs
Ringing Time	≤1.8ms	ms
Capacitance	2100pF±25% at 1kHz	pF
Directivity	110×50deg	°
Operating Temp. Range	-40 to +85	°C
Storage Temp. Range	-40 to +85	°C
Detectable Range	0.3 to 2	m
Maximum Input Voltage	160Vp-p	Vp-p
Housing Material	Aluminium	-

## Diagram

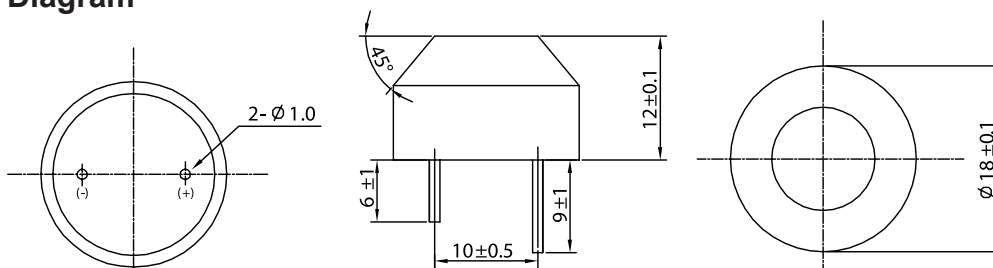


Dimensions : Millimetres

## Beam Pattern

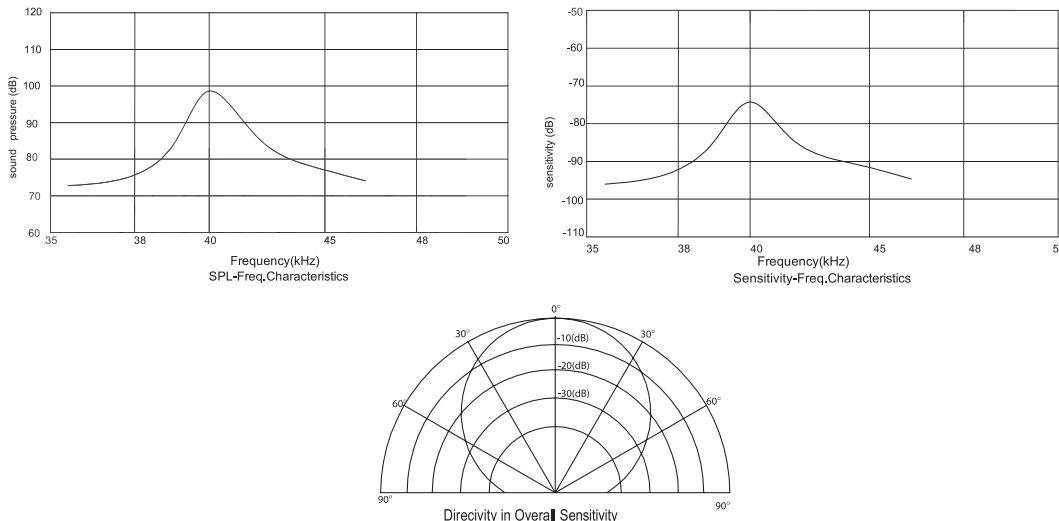


## Test Circuit

Echo&Rest.Resonant Time test circuit

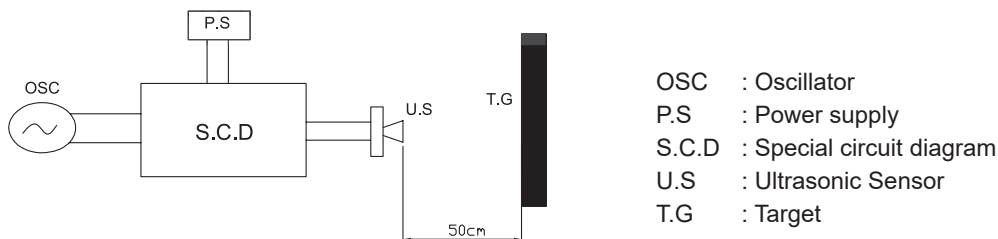


- OSC : Oscillator
- P.S : Power supply
- S.C.D : Special circuit diagram
- U.S : Ultrasonic Sensor
- T.G : Target

S.P.L test circuit

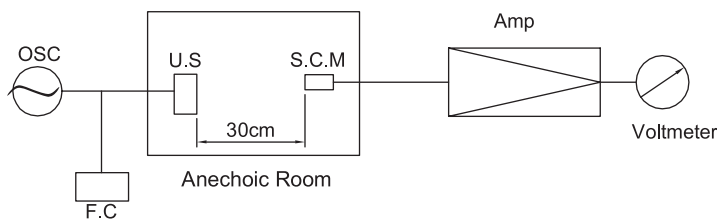

- OSC. : Oscillator
- F.C : Frequency Counter
- U.S : Ultrasonic Sensor
- S.C.M : Standard Capacitor Microphone
- Amp. : Amplifier

sensitivity test circuit

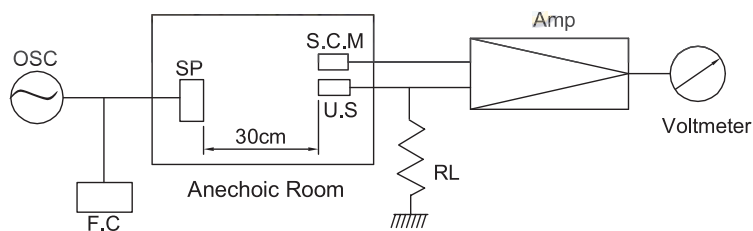

- OSC. : Oscillator
- F.C : Frequency Counter
- U.S : Ultrasonic Sensor
- S.C.M : Standard Capacitor Microphone
- Amp. : Amplifier
- SP : Tweeter
- RL : 3.9kΩ

## Reliability Test

High temperature life test	
Temperature	+85 ±3°C
Duration	500hrs
Low temperature life test	
Temperature	-40 ±3°C
Duration	500hrs
Heat Cycle Test	
Temperature	+85±3°C 1hour -40±3°C 1hour
Cycles	100 cycles
Humidity Test	
Temperature	+65 ±2°C
Relative Humidity	90 ~ 95%
Duration	500hrs
Vibration Test	
Vibration Frequency	10~ 200Hz
Sweep Period	15min
Acceleration	43.12m/s <sup>2</sup> (4.4G)
Direction	3 (x, y & z)
Time	96hours/direction
Shock test	
Acceleration	sine 980 m/s <sup>2</sup> (100G)
Direction	3 directions
Shock time	3 time/directions
Drop test	
Height	1m onto concrete floor
Times	10 times

### Connector soldering check:

Immersing terminal up to 1mm below base in soldering bath at 260°C 10 seconds

### Notice:

The variation of the S.P.L at 40 kHz is within 3dB compared with initial figures at 25°C in 24 hours after above test condition.

## Part Number Table

Description	Part Number
Transceiver, 40kHz, 18mm, Metal	MCUSD18A40B12RS

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.